


Wi-Fi Reconnection Guide

Video Guide:

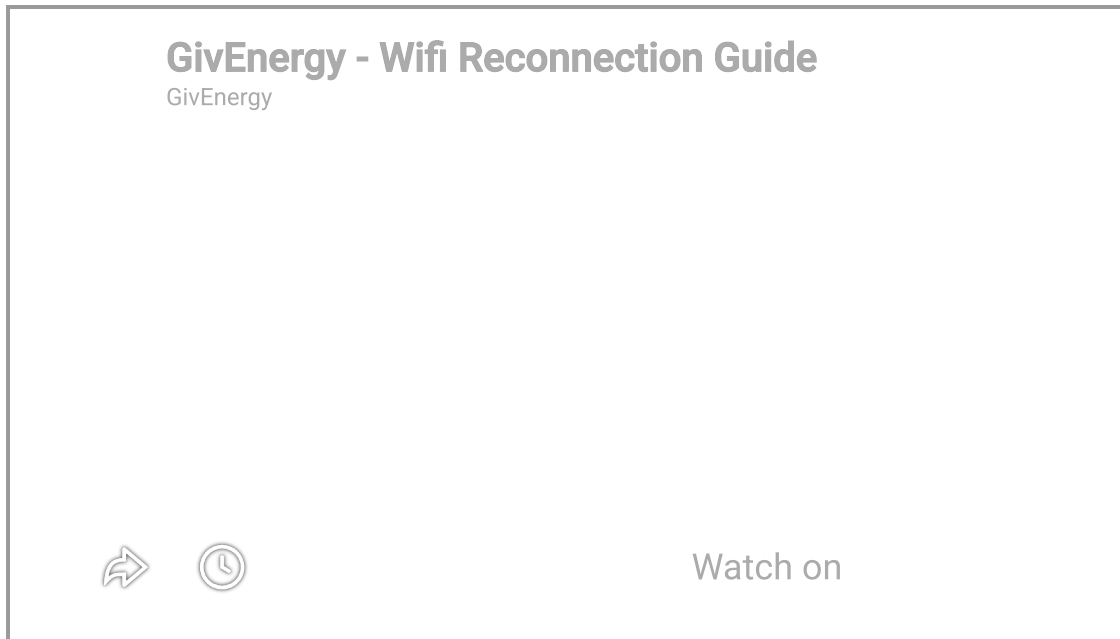

If your inverter or battery has gone offline (for example after changing your router, SSID, or Wi-Fi password), you can reconnect it using your browser.

1. Use a laptop, tablet, or phone that can connect to Wi-Fi.

2. Disconnect from your home Wi-Fi.
3. Connect to the inverter's Wi-Fi network (it will appear as a string of letters/numbers).
4. Open a browser and type **10.10.100.254** in the address bar.
5. Log in with:
 - Username: admin
 - Password: admin (unless you've changed it).
6. Set **STA mode** and **transparent mode**, then click **Apply**.
7. Go to **STA interface setting** → **Search**.
8. Select your home 2.4GHz Wi-Fi and check signal strength (RSSI).
 - Below 60% may cause issues.
9. Enter your Wi-Fi password, set security to **WPA2**, and click **Apply**.
10. Reboot the module via **Device Management** → **Restart**.

Troubleshooting:

- Double-check Wi-Fi password entry (case-sensitive).
- Ensure you're connecting to 2.4GHz, not 5GHz.
- If connection fails, repeat steps carefully.

When to Contact Support:

If you cannot reconnect after multiple attempts.

<https://givenergy2025.zohodesk.eu/portal/en/kb/articles/how-to-reconnect-your-givenergy-system-to-wi-fi>